



## MODELS

KGV-MR-(2, 3, 4, 5, 6)-R

**HIGH VOLUME GRAB-N-GO CASE  
FOR REMOTE CONDENSING UNIT**

CASE HOLDS 33°F TO 40°F • FORCED AIR REFRIGERATION  
FRONT & REAR LOADING • LED LIGHTING IN CANOPY AND UNDER SHELVES  
CASES CAN BE MULTIPLEXED



Intertek



Intertek



AUTODESK®  
REVIT®

REMOTE	Model	Number of Doors	O.A. Length (inches)	Volume FT <sup>3</sup>	Total Amps	BTUS	Weight lbs		Crate Size (inches)		
							No Crate	With Crate	L"	W"	H"
	KGV-MR-2-R	2 x 23-1/2	51.5	37.63	2.61	3345	639	847	54	39	85
	KGV-MR-3-R	3 x 23-1/2	75.4	56.37	3.45	4430	899	1166	78	39	85
	KGV-MR-4-R	4 x 23-1/2	99.4	75.26	5.22	6811	1278	1694	104	36	85
	KGV-MR-5-R	5 x 23-1/2	123.2	94	6.06	7795	1538	2013	126	36	85
	KGV-MR-6-R	6 x 23-1/2	147	112.73	6.9	9397	1798	2332	150	36	85

\* Note for other lengths please contact MVP

### STANDARD FEATURES


- Silver colored PVC coated steel front panel
- CFC free injected foam insulation
- PVC coated steel gray interior
- Black steel kick plate
- Foamed polystyrene black end panels
- Height adjustable shelves can be tilted
- Back doors for rear loading
- Product stops on all shelves
- Temperature and defrost regulated by a digital controller
- Levelling feet

### OPTIONAL FEATURES

- Other colors available
- Stainless steel exterior and / or interior
- Additional shelves
- Price tag molding
- Product dividers
- Joining Kit
- Partition

### WARRANTY

One year parts and labor (case only).

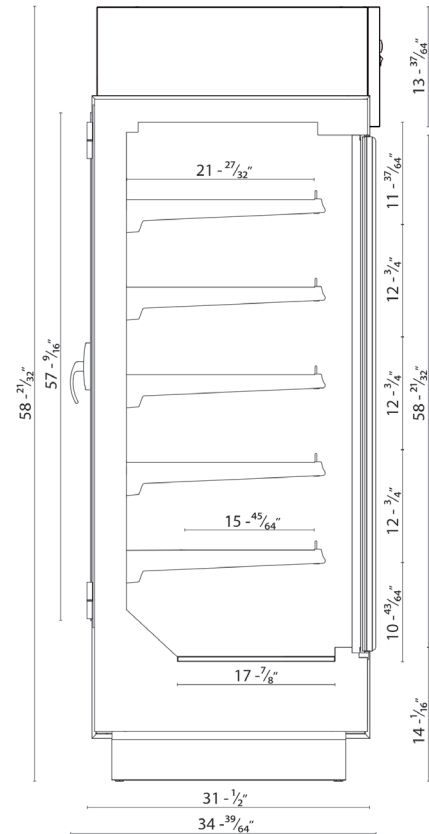

### NOTE

These cases are engineered to operate in locations not exceeding 75°F and 55% R.H. These cases are designed to operate using R404a refrigerant. Alternate refrigerants available by special order. O.A. length includes (2) ends at 1-7/8" each. Ventilation grills at front and back cannot be blocked. B.T.U.'s are calculated at 14°F (evaporator) and 90°F (ambient). Floor drain must be provided. Remote cases are provided with an expansion valve and a liquid solenoid for pump down cycle. Cases must be hard wired – no plugs.